


# Interior White ★★★★★

Universal, solvent-free, interior wall and ceiling paint

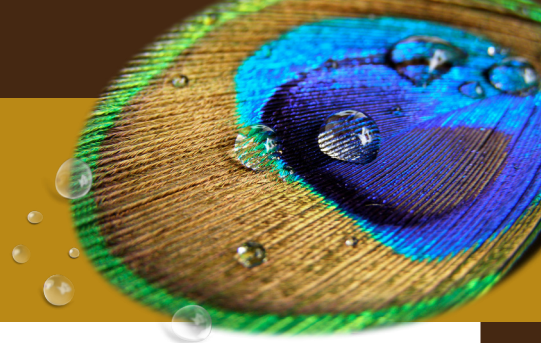

Can be used universally in homes, offices, schools and public facilities, on all firm wall and ceiling areas. Outstandingly well suited to woodchip wallpaper, nonwoven wall covering, gypsum plaster, lightweight building boards and firm old coatings. Recommended for building biology and room climate reasons. Can be tinted in a pastel colour with AGLAIA Natural Resin Full Colour Paints.

## 1. Product Properties

AGLAIA Interior White is a natural resin emulsion paint for universal use that has been tried and tested in practice for decades in countless buildings and has good functional and working properties. It is especially suitable for efficient, healthy interior design in new build and for renovation work. Valuable building biology properties because of renewable plant-based raw materials with good human-tolerability and environmental compatibility.

### 1.1. Composition

- Pure vegetable stand oils and tree resins
- Mineral pigments: lightfast and of natural origin
- Free from plasticisers and synthetic resins
- Solvent-free, low emissions and low VOC
- "Transparent recipe": see AGLAIA full product declaration

### 1.2. Technical properties

#### 1.2.1. Overview

- Use on interior surfaces
- Opaque
- Low tension
- High wet-scrub resistance
- Lightfast and colourfast in pastel coloured shades
- Water vapour permeable and valuable building physics properties
- Resistant to proprietary cleaning products and disinfectants

#### 1.2.2. Important building physics characteristics

Parameter	Value	Conformity
Density 20°C:	1.42 kg / L	
pH value 20°C:	8 – 9	
Dynamic viscosity 20°C:	6,000 mPas	
W <sub>24</sub> value:	0.2 kg/(m <sup>2</sup> h <sup>1/2</sup> )	
s <sub>d</sub> value (H <sub>2</sub> O):	0.1 m	
Hiding power/ contrast ratio:	Class 2	EN 13300
Wet-scrub resistance:	Class 2	EN 13300
Grain size:	fine	EN 13300
Gloss level at 85°C:	dull matt	EN ISO 2813
Flammability class:	A2 nonflammable	EN 13501-1, DIN 4102
VOC content (max.):	5 g / L	ChemVOCFarbV (Regulations limiting VOC emissions of paints and lacquers), Cat. A / a

#### 1.2.3. Colour

- White and Off-White.
- Tintable pastel colour can be achieved with AGLAIA Natural Resin Full Colour Paint with no more than 20% full colour content.


## 2. Use

### 2.1. Substrate requirements

- The substrate must be clean, dry, firm and stable and must be free from efflorescent and separating substances.
- Check drying and strength of new plaster.
- Carefully make good chipped surfaces and misses with the same type of material and the same texture.

# Interior White ★★★★★

Universal, solvent-free, interior wall and ceiling paint

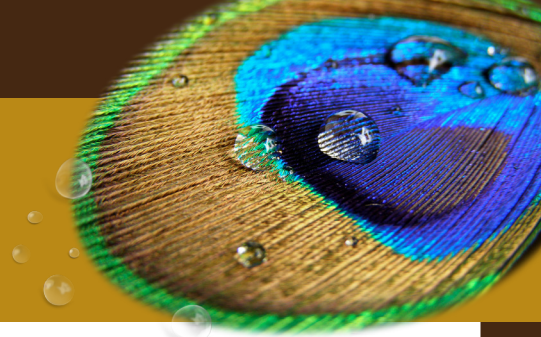

- Use plaster to repair cracked substrates. Areas with individual hairline cracks and minor structural defects can be pre-coated all over with AGLAIA Roll-On Plaster (0.4 mm grain); try out on a test area. Alternatively, cover with nonwoven wall covering.
- Ensure uniform substrates and careful application on high visual quality surfaces and in glancing light.

## 2.2. Brief information on the standard system

- Apply two coats of AGLAIA Interior White.
- Add water to AGLAIA Interior White for the priming coat and final coat to make it optimally coatable for the substrate and for use.
- Prime highly absorbent surfaces with AGLAIA Wall Primer.
- Seal efflorescent substrates as well as rust and water stains with AGLAIA White Isolating Primer.

## 2.3. Substrate and preparatory treatment

### • Lime plaster (PI/CSII), lime-cement plaster (PII), cement plaster (PIII) gypsum plaster, plaster stucco:

Check drying and strength of plaster or render. Check new plaster for sinter skin; remove any sinter skin found by sanding. Prime highly absorbent plaster with AGLAIA Wall Primer, thinned with 2 parts water. Consolidate superficially sanding, but nonetheless firm plaster with AGLAIA Penetrating Primer (solvent-based!).

### • Gypsum boards:

Ensure proper installation and required surface quality and evenness tolerances under the given on site and glancing light conditions (VOB/C and quality level 3 or 4, according to good practice guide No. 2 issued by the German gypsum industry association (Bundesverband der Gipsindustrie e.V.)). Prime gypsum board with AGLAIA Wall Primer, thinned with 2 parts water. An exception is water-repellent impregnated wet room boards; these are not to be primed. Recommendation: full surface bonding of nonwoven wall covering on lightweight building boards.

### • Wood-based materials (OSB, particleboards, MDF):

Precoat with AGLAIA Penetrating Primer and AGLAIA White Isolating Primer. Always try out on a test area on site. Not suitable for surfaces exposed to splashing or spray water, e.g. in sanitary units.

### • Calcium silicate masonry, brick:

Clean the surface thoroughly and check for absorbency, moisture damage and efflorescence (e.g. salt edges). Make good crumbling bricks and joints. Coat highly absorbent substrates with AGLAIA Penetrating Primer (solvent-based!). A slurring intermediate coat can be applied with AGLAIA Roll-On Plaster.

### • Concrete:

Thoroughly clean with water and formwork release oil remover and rinse off with clean water. Test the wettability of the cleaned substrate by spraying on water. Prime highly absorbent areas with AGLAIA Wall Primer, thinned with 2 parts water. Apply two coats of AGLAIA Interior White. For an even wall design, free from voids or shrink holes, coat the whole surface with cement filler or nonwoven wall covering.

### • Nonwoven wall covering, fabric, textured/embossed wallpapers, woodchip wallpaper:

Check for full, homogeneous and overlapping-free bonding of the whole surface, including in the area of joints. Suitable only for water-wettable, overcoatable nonwoven wall covering and wallpapers.

### • Old coatings:

Clean thoroughly matt, absorbent and fully adhering synthetic resin or natural resin-based emulsion coatings. Overcoat directly with AGLAIA Interior White, we recommend that you try out on a test area on site. Remove lacquer, oil and latex coatings. Brush off chalking coatings. Renovate highly alkaline limewash and silicate system coatings with BEECK Mineral Paints.

### • Unsuitable substrates are less stable, efflorescent and non-porous substrates, e.g. clay or loam and plastics.

### • Defective substrates require a differentiated approach. Rooms with continuously high humidity and mould problems are unsuitable. Apply a renovation plaster to damp, salt contaminated surfaces, basement walls and base areas, and coat with BEECK Mineral Paints.

## 2.4. Application instructions


### 2.4.1. General information

Check substrate suitability as required (see 2.1 and 2.3). Pay particular attention to the absorbency, strength and texture of the respective substrate. Try out on a test area before using on high quality surfaces.

- Carefully cover surfaces which are not to be treated – especially floors, windows, furniture and expansion joints – and protect them from splashes.
- Only use containers from the same production batch to coat self-contained areas.
- If applying tinted coatings, ensure sufficient qualified workers and smooth, uninterrupted coating process.
- Before use, stir AGLAIA Interior White thoroughly with a powered mixing paddle before use.
- Add water to make optimally coatable.
- Do not apply on heated or chilled through areas.
- Minimum application temperature: +16°C
- Drying time: at least 12 hours per coat.
- Ensure sufficient ventilation (purge ventilation) and heat (room temperature) for several days for drying.

# Interior White ★★★★★

Universal, solvent-free, interior wall and ceiling paint

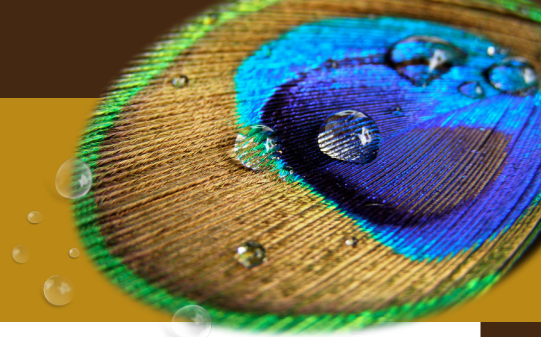

## 2.4.2. Application

With roller, brush or using an airless spraying method. Apply on self-contained areas with a thin coating, no overlapping and uniformly in one continuous pass with a cross coat.

### • Application with roller or brush:

- Use rollers with a uniform coating finish.
- Avoid roller edges, overlapping and overcoating coats that have already begun to dry.
- Cut-in edges smoothly and seamlessly, wet-on-wet, together with the main area.
- For a brushed surface, use a BEECK Mineral Paint Brush to spread without brushing in any particular direction.

### • Coats:

- 1. Priming coat: Add approx. 5 – 10% water to improve coatability.
- 2. Topcoat: After at least 12 hours, unthinned or made optimally coatable with no more than 5% water.
- If applied carefully on uniform substrates of the same colour, one coat can suffice, e.g. for renovation coatings. To do this, mix with around 5% water and pay attention to uniform, void-free application.

### • Spraying method (airless):

- Nozzle: 0.43 mm / 0.017 inch
- Always sieve the product before use.
- Thin with approx. 5% water.
- Apply uniformly and as a thin coating; if necessary, use a brush or roller to lay-off.

## 2.5. Auxiliary products

- AGLAIA Wall Primer: Priming highly absorbent substrates, such as gypsum.
- AGLAIA Penetrating Primer: Consolidator for crumbly and efflorescent substrates.
- AGLAIA White Isolating Primer: barrier primer for efflorescent substrates.
- AGLAIA Natural Resin Full Colour Paint: for tinting and as a full colour coating.
- AGLAIA Roll-On Plaster: Slurrying coat with texture grain 0.4 mm.

## 3. Application Rate and Container Sizes

The application rate, i.e. the quantity required for smooth, normally absorbent substrates is approx. 0.13 L per m<sup>2</sup> and pass. Try on a test area on site to determine substrate-related application rate differences and the number of coats required.

**Container sizes:** 1L/5L/10L

## 4. Cleaning

Clean equipment, tools and soiled clothing thoroughly with soapy water immediately after use.

## 5. Storage

Stored cool and frost-free in the original container can be kept for at least 12 months. Use up opened container as soon as possible.

## 6. Safety Instructions

- Comply with the EU Safety Data Sheet. Avoid contact with skin and eyes. Repeated contact may cause allergic reactions in people who are particularly sensitive. For details of product composition refer to AGLAIA full product declaration. Even natural products are not free from emissions. Ensure sufficient ventilation and heat. Do not occupy rooms until they are through-dry and all odours have dissipated. Do not breathe the vapour, spray and dust. Carefully cover the area surrounding the surfaces to be coated, wash off splashes immediately with water. Keep out of the reach of children. Dispose of in accordance with the legal regulations.
- Waste code (EWC code): 080112

## 7. Declaration

This technical information is offered as advice based on our knowledge and practical experience. All information and tips are provided without guarantee and do not establish rights to make any claims of any kind whatsoever. The information provided does not release the user from their responsibility to check the product's suitability and application method for the specific substrate on which it is to be used. Subject to change without notice as part of our product development. Additives for tinting, thinning, etc. are not permitted. Check the colours before use. This information sheet becomes invalid automatically when a new edition is issued. The information in the current version of the EU Safety Data Sheets is binding for classification according to the Hazardous Substances Regulations, disposal, etc.

**Head office:** Louis Gnatz GmbH  
Ottostraße 13  
D-84030 Landshut  
www.farben-gnatz.de

**Factory:** BEECK'sche Farbwerke  
Louis Gnatz GmbH  
Gottlieb-Daimler-Strasse 4  
D-89150 Laichingen

Tel. +49 7333 96 07 11  
Fax +49 7333 96 07 10  
info@aglaia.de  
www.aglaia.de